

Technical drawing of a rectangular plate with a central octagonal hole. The drawing includes dimensions for the overall size, hole size, and chamfered corners. The outer dimensions are 1760 mm by 1280 mm. The inner octagonal hole has a width of 1300 mm and a height of 1000 mm. The corners of the hole are chamfered with a 150 mm radius. The plate has a thickness of 20 mm. The drawing is labeled 'Fig. 1' and 'Fig. 2'.

敷モルタル

Technical drawing of a rectangular plate with dimensions in mm. The overall dimensions are 1760 mm in width and 1380 mm in height. The plate has a central rectangular cutout with a width of 1300 mm and a height of 1100 mm. The cutout has chamfered corners with a radius of 150 mm. The plate is supported by a base with a thickness of 20 mm. The base has a width of 1660 mm and a height of 150 mm. The base is supported by four circular supports, each with a diameter of 50 mm. The plate is labeled with dimensions: 1560, 130, 1300, 130, 140, 1100, 140, 20, 150, 150, 150, 150, 1660, 1760, 50, 50.

敷モルタル

Technical drawing of a rectangular plate with dimensions:

- Overall Dimensions:**
 - Width: 1760
 - Height: 1480
- Internal Features:**
 - A central rectangular area with a width of 1300 and a height of 1200.
 - Four corner chamfers, each with a radius of 150.
 - A horizontal band at the bottom containing a pattern of small circles, with a total height of 200.
- Other Dimensions:**
 - The distance from the left edge to the start of the internal rectangle is 130.
 - The distance from the right edge to the end of the internal rectangle is 130.
 - The distance from the top edge to the start of the internal rectangle is 140.
 - The distance from the bottom edge of the internal rectangle to the top of the circular band is 140.
 - The distance from the left edge to the center of the circular band is 50.
 - The distance from the right edge to the center of the circular band is 50.

敷モルタル

Technical drawing of a rectangular table with a central rectangular top and four trapezoidal legs. The table has a total width of 1560 mm and a total depth of 1580 mm. The central top is 1300 mm wide and 1300 mm deep. The legs are 150 mm wide at the base and 150 mm deep. The drawing includes dimensions for the top, legs, and overall size.

敷モルタル

Technical drawing of a rectangular frame with dimensions and chamfered corners. The overall dimensions are 1760 (width) and 1680 (height). The inner frame dimensions are 1300 (width) and 1400 (height). The frame has chamfered corners with a chamfer width of 150. The drawing includes a detailed view of the corner chamfer and a section view showing the internal structure of the frame, including a central panel with a pattern of small circles and a base with a pattern of larger circles.

敷モルタル

Technical drawing of a rectangular plate with dimensions and a central cutout. The overall dimensions are 1780 mm in height and 1560 mm in width. The central cutout is a rectangle with dimensions 1500 mm by 1300 mm. The cutout has chamfered corners with a radius of 150 mm. The plate has a thickness of 20 mm. The drawing includes a section line and a hatched area indicating the material.


敷モルタル

Technical drawing of a rectangular plate with dimensions and a central square hole. The overall dimensions are 1760 mm in width and 1880 mm in height. The central square hole has a side length of 1560 mm. The plate has a 20 mm thick border. The central square hole is offset from the bottom and right edges by 140 mm. The hole has chamfered corners with a radius of 150 mm. The bottom edge of the plate features a series of circular holes (punch holes) spaced at 50 mm intervals, starting from the left edge. The top edge of the plate has a series of circular holes (punch holes) spaced at 130 mm intervals, starting from the left edge. The right edge of the plate has a series of circular holes (punch holes) spaced at 130 mm intervals, starting from the top edge.


敷モルタル

Technical drawing of a rectangular panel with dimensions and a decorative border. The overall dimensions are 1760 (width) and 1980 (height). The panel features a central rectangular area with a decorative border. The border is composed of a series of small circles, with a larger circle at the bottom center. The panel is divided into sections by lines, with dimensions 130, 1300, and 130 indicated for the top section, and 140, 1700, and 140 for the left section. The central area has a width of 1560 and a height of 1500. The panel is shown in a perspective view, with a 3D effect created by a shaded area on the right side. The drawing is labeled with dimensions in millimeters (mm).

敷モルタル

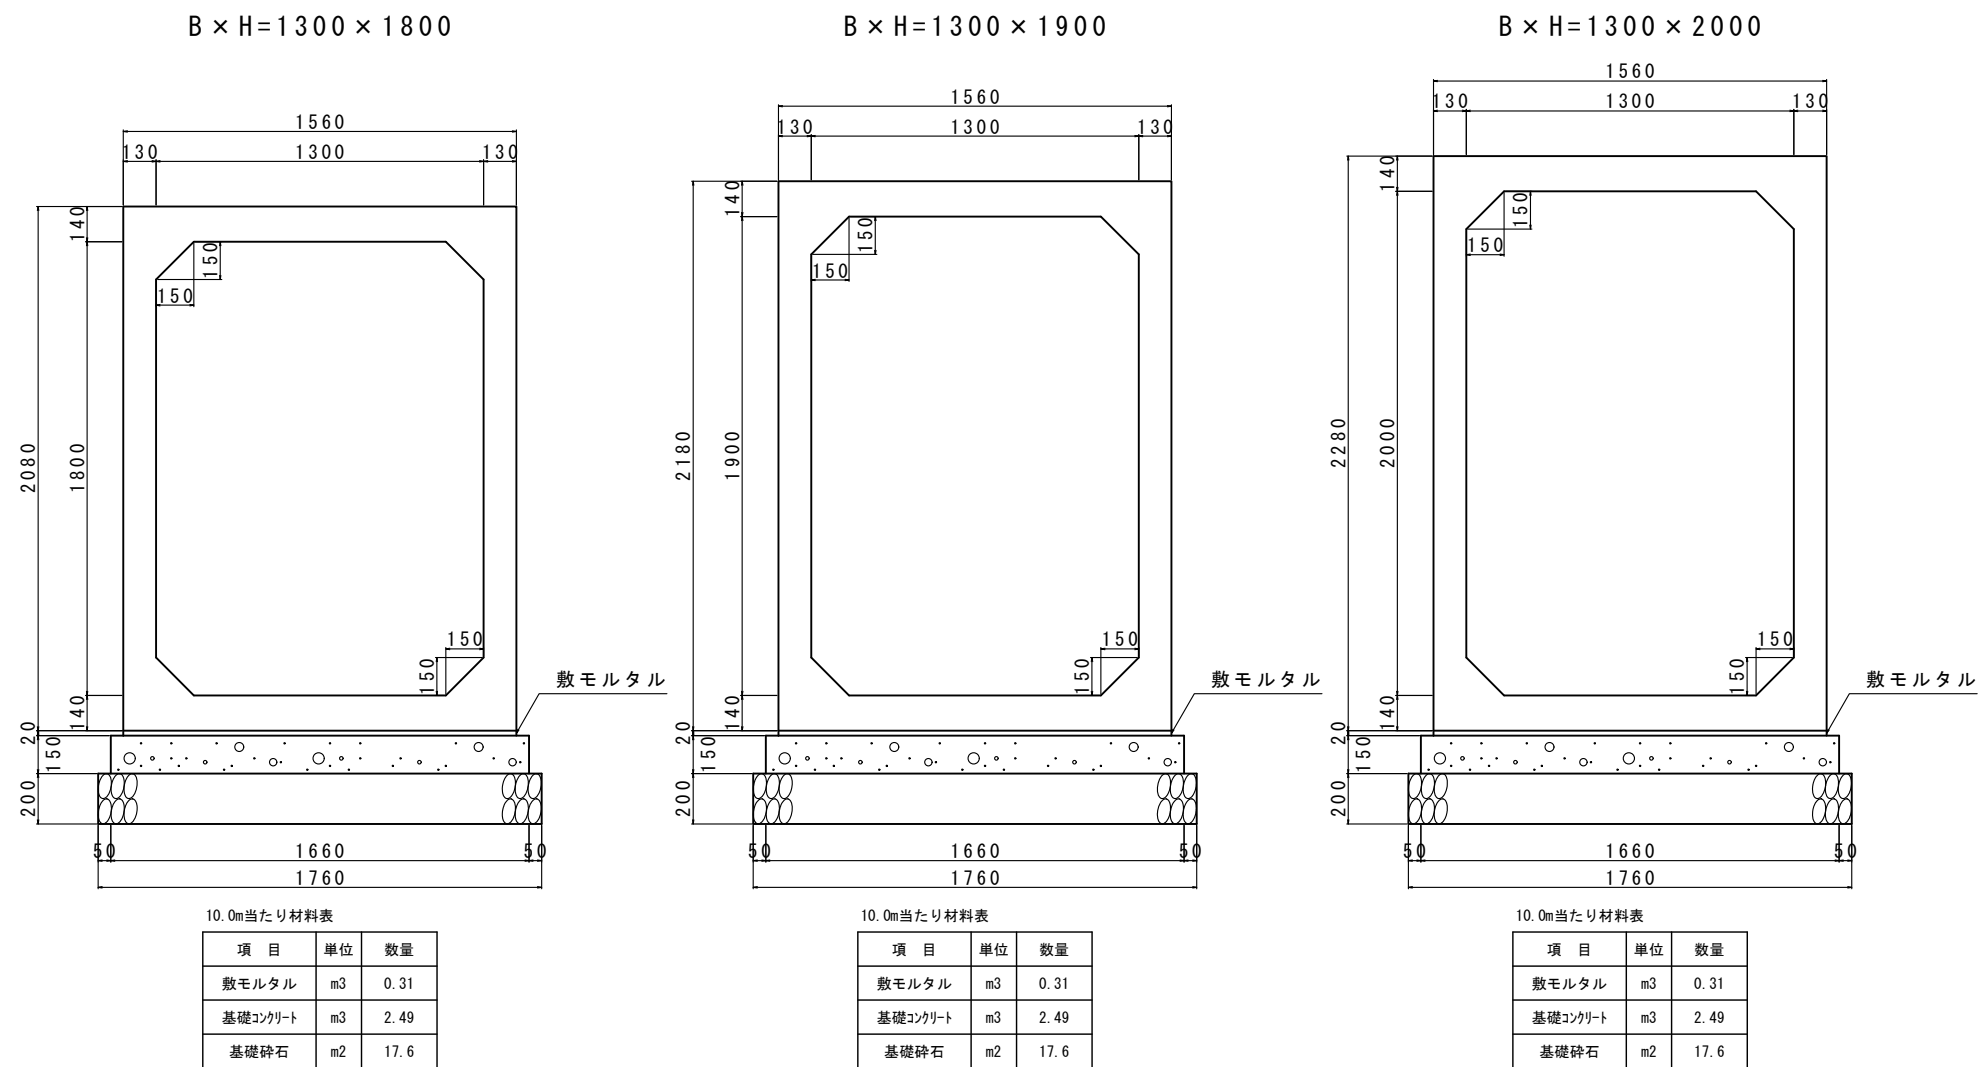

IB可とうゴムリング 断面 S=1/5



継手部詳細図 S=1/10

