


防音型自由勾配側溝 寸法及び材料表


(OS側溝・横断用)

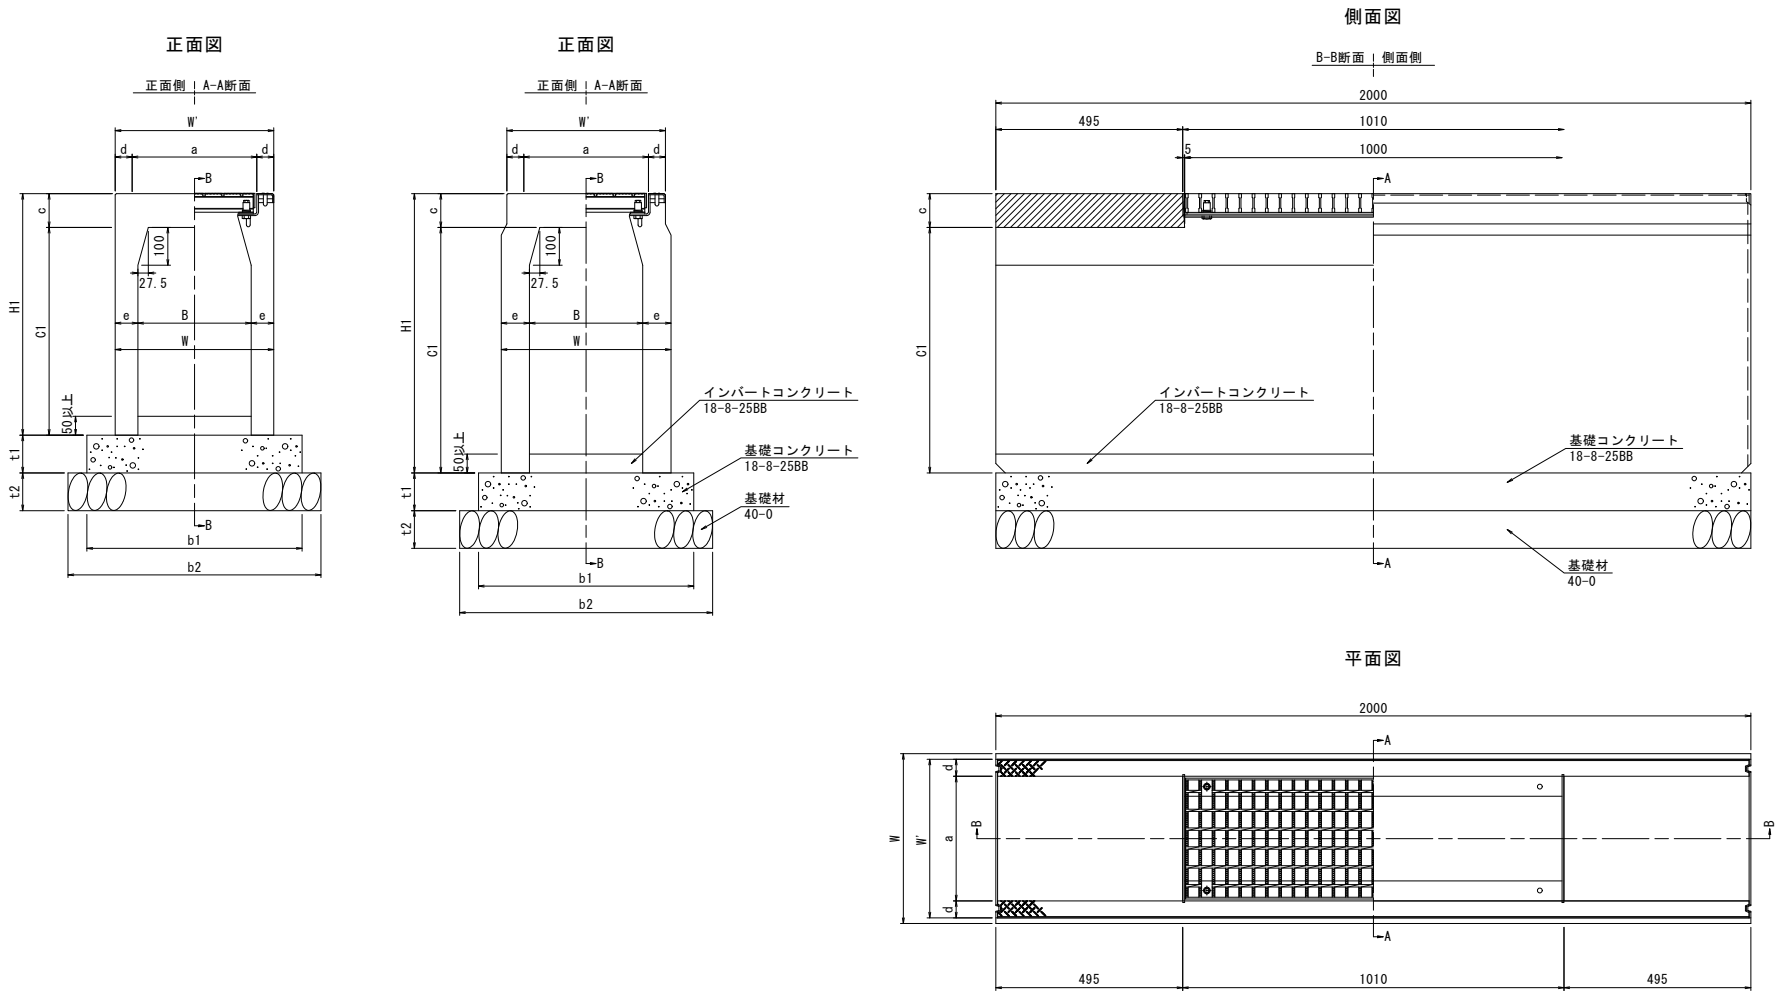

製品規格寸法・重量及び使用材料一覧表


内幅 B (mm)	内高 H (mm)	寸法 (mm)									重量 (kg)	基礎寸法 (mm)				材料表 (10m当り)		
		W	W'	C1	a	c	d	e	H1	b1		b2	t1	t2	ベース コンクリート (m3)	基礎材 (m2)	型枠 (m2)	
300	300	420	420	350	330	89.5	45	60	439.5	340	570	670	100	150	0.57	6.7	2.0	
	400	420		450				60	539.5	398								
	500	420		550				60	639.5	456								
	600	450		650				75	739.5	606								
	700	450		750				75	839.5	678								
	800	450		850				75	939.5	750								
	900	450		950				75	1039.5	822								
	1000	470		1050				85	1139.5	994								
	1100	470		1150				85	1239.5	1076								
1200	470		1250				85	1339.5	1158									
400	400	530	530	450	430	105	50	65	555	470	680	780	100	150	0.68	7.8	2.0	
	500	530		550				65	655	533								
	600	530		650				65	755	595								
	700	550		750				75	855	711								
	800	550		850				75	955	780								
	900	550		950				75	1055	898								
	1000	580		1050				90	1155	1045								
	1100	580		1150				90	1255	1185								
	1200	580		1250				90	1355	1272								
500	400	650	650	450	540	120	55	75	570	576	790	890	150	150	1.19	8.9	3.0	
	500	650		550				75	670	648								
	600	650		650				75	770	720								
	700	650		750				75	870	792								
	800	650		850				75	970	864								
	900	690		950				95	1070	1099								
	1000	690		1050				95	1170	1190								
	1100	690		1150				95	1270	1281								
	1200	690		1250				95	1370	1373								
600	1300	690		1350				95	1470	1464								
	1400	690		1450				95	1570	1555								
	400	760	760	450	650	135	55	80	585	663	900	1000	150	150	1.35	10.0	3.0	
	500	760		550				80	685	740								
	600	760		650				80	785	817								
	700	760		750				80	885	894								
	800	760		850				80	985	971								
	900	760		950				80	1085	1047								
	1000	800		1050				100	1185	1307								
	1100	800		1150				100	1285	1403								
	1200	800		1250				100	1385	1499								
	1300	800		1350				100	1485	1595								
	1400	800		1450				100	1585	1691								
	1500	800		1550				100	1685	1787								

ボルト固定式グレーチング・並目 (L=995)

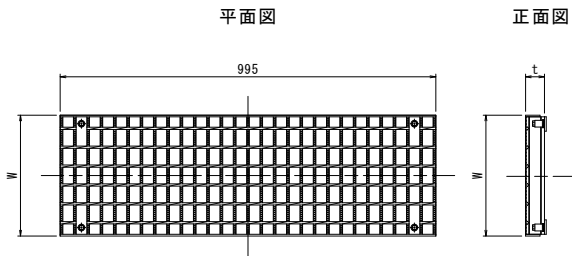

規格	W (mm)	t (mm)	重量 (kg)
300用	320	50	25
400用	420	60	38
500用	530	75	52
600用	640	80	68

ボルト固定式グレーチング・細目 (L=995)

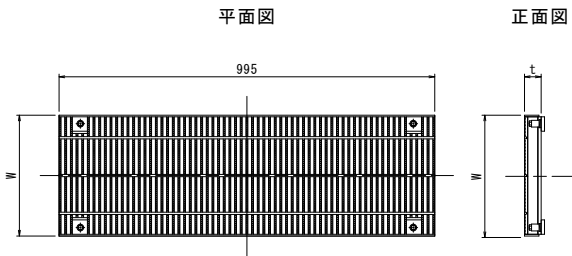

規格	W (mm)	t (mm)	重量 (kg)
300用	320	44	36
400用	420	50	66
500用	530	60	99
600用	640	65	123